WEAPON R

US Patent# US 7,263,961B2

Recommended Air Filter Cleaning Intervals: 3000 Miles

Secret Weapon: 306-119-101 / 2005 Subaru OUTBACK H6 — CARB EO#: N/A

Parts List : **1 x Weapon*R Intake pipe / 1 x Weapon*R Air Filter 3" / 2 x 2.75"-3" coupler**
1 x Intake System Bracket kit / 4 x 3" Clamp

1. **Remove bolts securing OEM air cleaner box hose, loosen clamps on OEM rubber intake pipe.**
2. **Remove the OEM rubber intake tube, do not remove the OEM air cleaner box.**
3. **Unplug then unscrew the MAF sensor from the OEM air box hose and set aside.**
4. **Install the 3" coupler onto the air resonator box, secure with OEM clamp.**
5. **Insert the Weapon*R intake pipe into the 2.75" coupler. Tighten with a clamp.**
6. **Reinstall the MAF sensor into the Weapon-R adapter on the piping Plug the MAF back in to the OEM wire harness.**
7. **Install 2.75"-3" coupler onto Secret Weapon air filter, secure with supplied clamp.**
8. **Install the filter assembly on the end of the Weapon*R intake pipe. Tighten with the OEM clamp.**
9. **Place the U-shaped end of the bracket under the clamp on the air filter.**
10. **Install the rubber mounting grommet in the hole closest to the Weapon*R air filter.**
11. **Bend the straight end of the bracket to meet the rubber mounting grommet.**
12. **Secure with the washer and nut from the bracket kit.**
13. **Position the intake pipe so it does not touch any part of the vehicle.**
14. **Check hood clearance. Adjust the intake tube for the best fit and clearance.**
15. **Place the Weapon*R CARB sticker in a visible spot in the engine bay (if applicable).**

DISCLAIMER: NOT LEGAL FOR SALE OR USE ON CALIFORNIA RESTRICTED AIR POLLUTION MOTOR VEHICLES.

Note: **Returned products may be subject to a restocking charge. INSTALLED PRODUCTS ARE NON-REFUNDABLE!**
Report any defective or missing parts to the authorized Weapon*R dealer you bought this product from.
Installation requires some mechanical skill. We recommend having a qualified mechanic install it.

Note: **After installing the intake, start the engine and let it idle to operating temperature before driving.**
Do not rev the engine until it is fully warmed up, or the check engine light may come on.

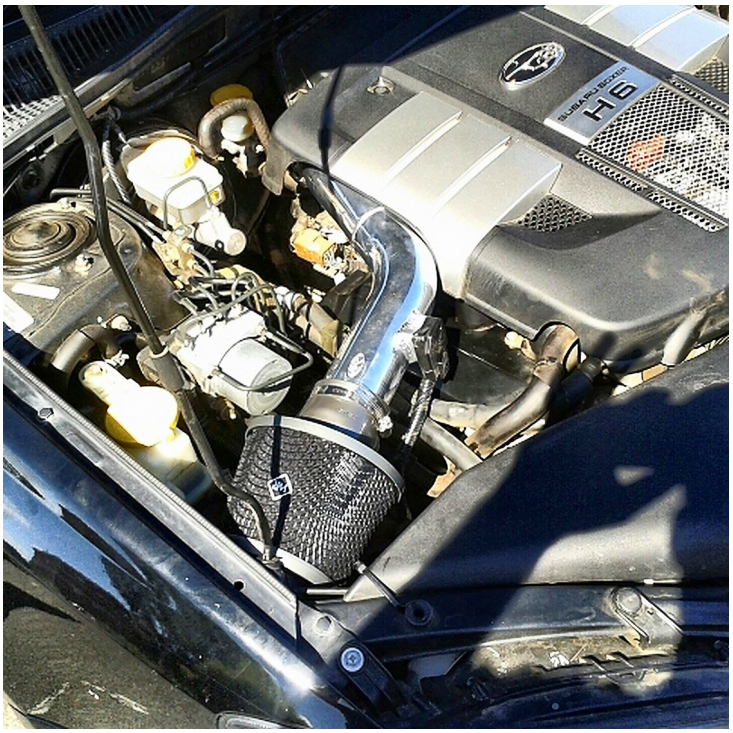

Question about this Product, Please refer to our website @ WWW.WEAPON-R.COM / Tel#650-877-8280